

# SUPERGRIT<sup>®</sup> TWO-STAGE SAFETY TREADS

## SUPERGRIT<sup>®</sup> FEATURES:

- Extruded aluminum base
- Optional wood insert for initial construction
- Removable top insert with abrasive filler
- Lengths to order - up to 8'0" max.
- High content of aluminum oxide abrasive
- 11 standard colors - Colors extend throughout filler
- Noncombustible
- Protective tape available


## SUPERGRIT<sup>®</sup> SPECIFICATION:

- Provide Supergrit<sup>®</sup> type **WP-RN3SG** safety nosings as manufactured by Wooster Products Inc for interior and exterior stairs.
- Nosing base shall be type 6063-T5 extruded aluminum.
- Anti-slip filler shall contain not less than 65% virgin grain Aluminum Oxide/Silicon Carbide abrasive.
- Nosings shall be noncombustible as tested under Federal Test Method Standard No. 501a. Method 6411
- Nosings shall terminate not more than 4" from ends of steps for poured concrete stairs; for concrete filled steel pan stairs, nosings shall be full length of steps less 1/8" clearance.
- Color shall extend uniformly throughout the filler; black color will be furnished if no other color is specified.
- Nosings shall finish flush with the top of the traffic surface.


## Type WP-RN3SG

3 1/8" wide, 9/16" thick  
DRAWING NOT TO SCALE

This series is designed to meet the OSHA requirements of the barrier-free code for stair construction.

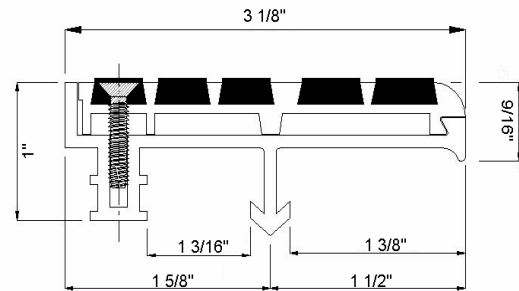

Nosing insert installed after construction for fresh clean appearance.

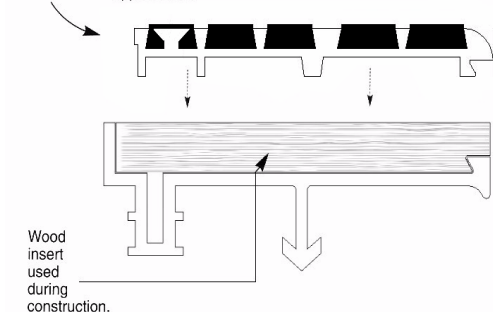

## GUIDELINES FOR THE INSTALLATION OF METAL SAFETY TREADS OR NOSINGS INTO NEW CONCRETE OR STEEL PAN FILLED STAIRS:

- The use of very large aggregate in the concrete mix may make placement of the safety nosing difficult.
- Safety nosing placement may be difficult in concrete with very low slump.
- Place concrete into the stair forms or steel pans as quickly as possible; schedule pours so as to install the metal safety nosings quickly before initial set of concrete occurs.
- Puddle the concrete; tamp the safety nosing to insure proper concrete formation around the anchors.
- Remove protective tape (if used) as soon as practical.
- Order nosings or treads well in advance of the pour or installation date.
- Close stairway after pour; permit no use for 24 hours.

**WOOSTER PRODUCTS INC., 1000 SPRUCE ST., WOOSTER, OH 44691**

**Toll Free: 800-321-4936 Phone: 330-264-2844 Fax: 330-262-4151**

**Web Site: <http://www.wooster-products.com>**

**E-mail: [sales@wooster-products.com](mailto:sales@wooster-products.com)**