TYPE 101

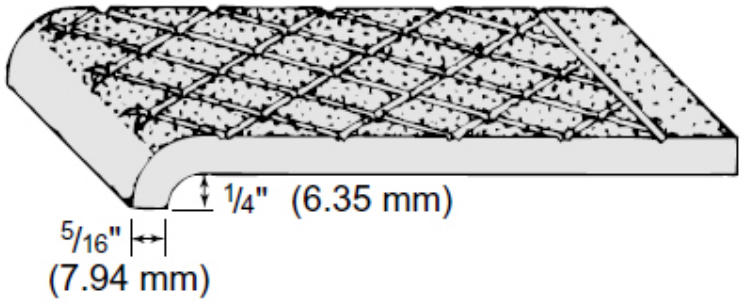

WOOSTER PRODUCTS INC.

http://www.woosterproducts.com

Chief use: as nosings, formed concrete stairs.
Tread installed flush all around.
Nose: 1/4" underside
Standard widths: 3", 4", 6"
Standard thickness: 5/16"

Max length in one section is:
8'6" in Alumogrit®
6'0" in Ferrogrit®
Lengths over max will be made in equal sections.

JOB NAME:	
CUSTOMER:	
PO#	
ARCHITECT:	
COMPANY:	
CONTACT:	
ADDRESS:	
CITY,ST,ZIP	
PHONE:	
FAX:	

PAGE: OF

NOTES:

METAL	DEPTH	THICKNESS	LENGTH	QTY	ANCHOR