



## ABRASIVE CAST SAFETY THRESHOLDS

### CAST THRESHOLDS PROVIDE:

Safe, anti slip walking surface.


### FEATURES:

- Maximum Durability in Rough Use
- Indoor or Outdoor Use
- Resistant to Corrosive Environment
- New Construction or Renovation
- Anti-slip Properties
- Ready to Install Convenience

### ABRASIVE CASTINGS SPECIFICATION:

- Provide Alumogrit® or Ferrogrit® type **114**, size\_\_\_\_, thresholds as manufactured by Wooster Products Inc. for interior and exterior use.
- Abrasive shall be #20 virgin grain Aluminum Oxide ( $Al_2O_3$ ) abrasive, integrally cast into the walking surface to a minimum depth of 1/32 inch.
- Cast metals used shall conform to the following specification:
  - Alumogrit® (Abrasive cast aluminum): No. 43 secondary ingot; low copper content; corrosion resistant.
  - Ferrogrit® (Abrasive cast iron): Class 20 iron; high silicon; machinable; hypereutectic.
- Any holes or countersinks shall be machine made. Screwheads shall not protrude above tread surface.
- All metal types shall have shot blasted finish; Ferrogrit treads shall have one coat shop-black paint.
- Cross hatching and fluting shall be 1/16 inch deep minimum and shall be clean and well defined.

### SADDLE TYPE THRESHOLD

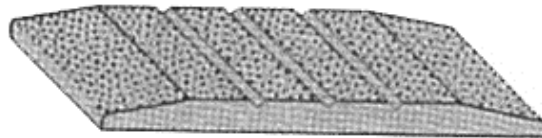

#### TYPE 114

Standard widths 4", 5", & 6"

Standard height - 3/8"

Other widths and heights as required.

Fluted surface is standard

(plain or cross hatched surface also available)

DRAWING NOT TO SCALE

**FASTENERS:** Thresholds are drilled and countersunk for 1/4" screws unless other fasteners are specified.

**NOTCHING:** Threshold ends can be factory notched for fast job site installation if frame details are furnished

**LENGTHS:** Lengths are to order up to 8'6" maximum in one piece in Alumogrit®, up to 6'0" in one piece for Ferrogrit®. Lengths over maximum will be made in equal sections

**WOOSTER PRODUCTS INC, 1000 SPRUCE ST., WOOSTER, OH 44691**

**Toll Free: 800-321-4936**

**Phone: 330-264-2844**

**Fax: 330-262-4151**

**Website: <http://www.wooster-products.com>**

**E-mail: [sales@wooster-products.com](mailto:sales@wooster-products.com)**