TYPE 101SP

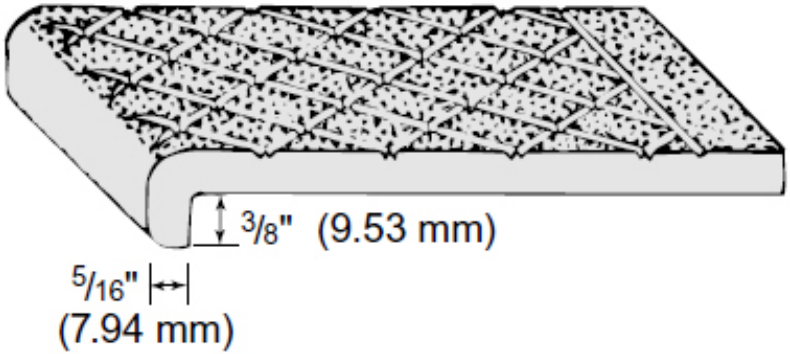

WOOSTER PRODUCTS INC.

http://www.woosterproducts.com

Chief use: as nosings on steel-pan concrete-filled stairs or on existing steps.
Nose: 3/8" underside
Standard widths: 3", 4", 6"
Standard thickness: 5/16"
Generally installed full stringer to stringer length, less 1/8" clearance

Max length in one section is 8'6".
Lengths over max will be made in equal sections.

JOB NAME:	
CUSTOMER:	
PO#	
ARCHITECT:	
COMPANY:	
CONTACT:	
ADDRESS:	
CITY,ST,ZIP	
PHONE:	
FAX:	

PAGE: OF

NOTES:

METAL	DEPTH	THICKNESS	LENGTH	QTY	ANCHOR
ALUMOGRIT					
ALUMOGRIT					
ALUMOGRIT					
ALUMOGRIT					
ALUMOGRIT					
ALUMOGRIT					
ALUMOGRIT					
ALUMOGRIT					
ALUMOGRIT					