



ABRASIVE CAST SAFETY THRESHOLDS

CAST THRESHOLDS PROVIDE:

Safe, anti slip walking surface.


FEATURES:

- Maximum Durability in Rough Use
- Indoor or Outdoor Use
- Resistant to Corrosive Environment
- New Construction or Renovation
- Anti-slip Properties
- Ready to Install Convenience

ABRASIVE CASTINGS SPECIFICATION:

- Provide Alumogrit® type **119**, size____, thresholds as manufactured by Wooster Products Inc. for interior and exterior use.
- Abrasive shall be #20 virgin grain Aluminum Oxide (AL₂O₃) abrasive, integrally cast into the walking surface to a minimum depth of 1/32 inch.
- Cast metals used shall conform to the following specification:
 - Alumogrit® (Abrasive cast aluminum): No. 43 secondary ingot; low copper content; corrosion resistant.
- Any holes or countersinks shall be machine made. Screwheads shall not protrude above tread surface.
- All cast products shall have shot blasted finish.
- Cross hatching and fluting shall be 1/16 inch deep minimum and shall be clean and well defined.

HOOK STRIP TYPE THRESHOLD

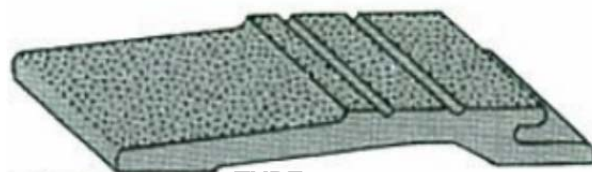

TYPE 119

Standard widths 4", 5", & 6"

Height - 5/8" only

Fluted abrasive surface

DRAWING NOT TO SCALE

Hook strip included (specify style – see below)



STYLE J



STYLE L

FASTENERS: Thresholds are drilled and countersunk for 1/4" screws unless other fasteners are specified.

NOTCHING: Threshold ends can be factory notched for fast job site installation if frame details are furnished

LENGTHS: Lengths are to order up to 8'6" maximum in one piece. Lengths over maximum will be made in equal sections

WOOSTER PRODUCTS INC, 1000 SPRUCE ST., WOOSTER, OH 44691

Toll Free: 800-321-4936

Phone: 330-264-2844

Fax: 330-262-4151

Website: <http://www.wooster-products.com>

E-mail: sales@wooster-products.com